

KVL-00 2p M8-M8



Specifications

ETI Code	001690895
Description	KVL-00 2p M8-M8
Class name	Fuse switch disconnectors
Rated current (A)	160
Type	KVL
Size	NH00
Number of poles	2
Product group	Horizontal fuse-switch disconnectors
Rated AC voltage (V)	690
Utilization category	AC-23B / DC-22B
Connection	M8
Rated DC voltage (V)	440
Mounting	Screw-on

Online product page 

Other documentation




- Technical data catalogue
- Certificate
- 3D Model
- Instruction manual
- CE declaration
- Eplan file


ETIM international clasification

Classification	EC001040
Class name	Fuse switch disconnecter
Version as main switch	1
Version as safety switch	1
Rated permanent current Iu	160A
Suitable for fuses	NH00
Number of poles	2
With error protection	
Type of electrical connection of main circuit	Screw connection
Suitable for floor mounting	1
Type of control element	Cover grip

Dimension drawing

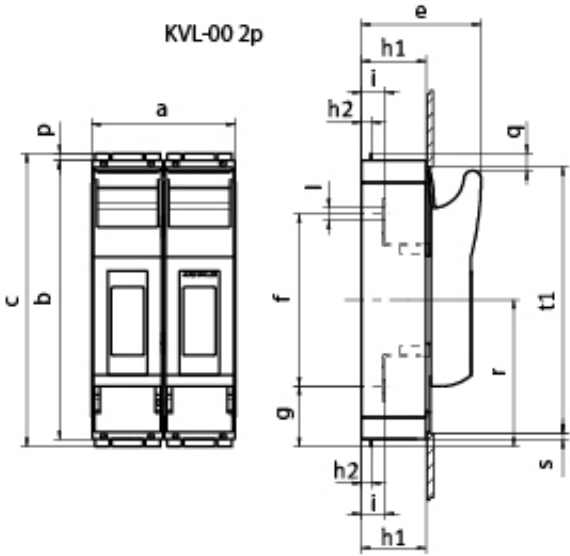

	a	b	c	e	f	g	h1	h2	h3	i	l	p	q	r	s	t1
KVL-00 1p M8-M8	50	195	204	84	120	42	45	7	-	16,5	Ø9	4,5	12	102	5	187
KVL-00 2p M8-M8	100	195	204	84	120	42	45	7	-	16,5	Ø9	4,5	12	102	5	187

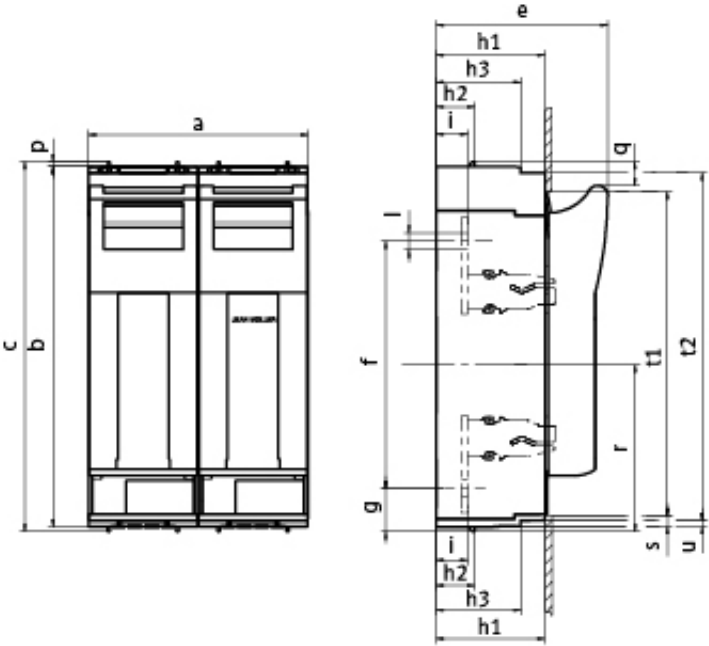

	a	b	c	e	f	g	h1	h2	h3	i	l	p	q	r	s	t1	t2	u
KVL-1 2p M10-M10	138	298	306	117	185	46	70	32	-	25	Ø10,5	4	19	138	5	272	-	-
KVL-3 2p M10-M10	182	298	306	143	205	36	90	32	70	26	Ø14	4	19	138	10	268	288	5