

CH10/14x85 gPV 25A/1500V



Specifications

ETI Code	002626235
Description	CH10/14x85 gPV 25A/1500V
Class name	Fuse link
Rated current (A)	25
Type	CH
Size	CH10/14x85
Characteristics	gPV
Rated DC voltage (V)	1500
Dimensions	10/14x85
Indicator	None
Breaking capacity DC (kA)	50
Power dissipation (W)	5,6
Standards	IEC 60269-6, UL 248-19
Power dissipation (0,7x I _n) (W)	2,3
Operating joule integral (A2s)	633,1
L/R (ms)	2
Prearcing joule integral (A2s)	72,3
Application	For protection of photovoltaic modules
UL certificate	E347771
efuse	1

Online product page 

Other documentation



Technical data catalogue

Certificate

3D Model


CE declaration

Eplan file

ETIM international clasification

Classification	EC002704
Class name	Cylindrical fuse
Rated current	25A
Rated voltage DC	1500
Application	For protection of photovoltaic modules
Construction size	Other
Type of fuse status indicator	None
Rated voltage	1500V
Voltage type	DC
Utilization category	Other

Characteristics

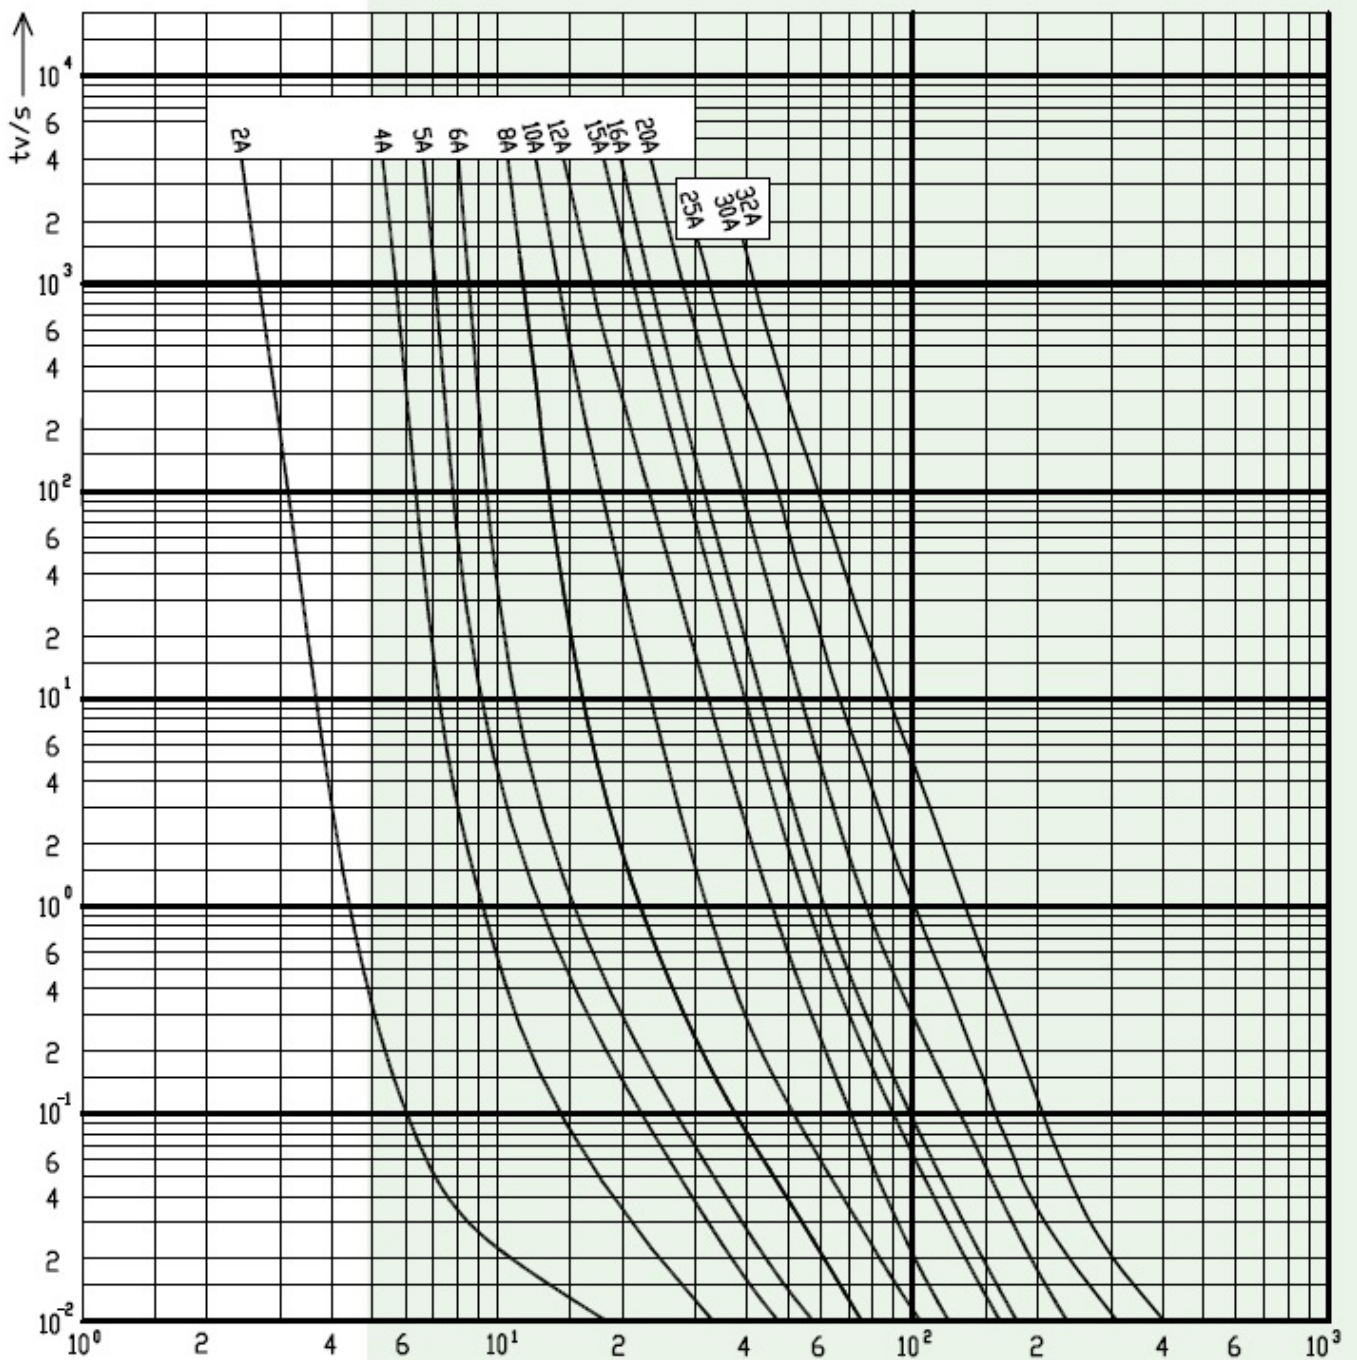

Dimension drawing

