

CH10/14x85 gPV 30A/1500V



Specifications

ETI Code	002626236
Description	CH10/14x85 gPV 30A/1500V
Class name	Fuse link
Rated current (A)	30
Type	CH
Size	CH10/14x85
Characteristics	gPV
Rated DC voltage (V)	1500
Indicator	None
Breaking capacity DC (kA)	50
Power dissipation (W)	6,4
Standards	IEC 60269-6, UL 248-19
Power dissipation (0,7x In) (W)	2,6
Operating joule integral (A2s)	959,2
L/R (ms)	2
Prearcing joule integral (A2s)	143,8
Application	For protection of photovoltaic modules
UL certificate	E347771
efuse	1

Online product page 


Other documentation

	Technical data catalogue
	Certificate
	3D Model
	CE declaration
	Eplan file

ETIM international clasification

Classification	EC002704
Class name	Low Voltage HRC fuse
Application	For protection of photovoltaic modules
Construction size	Other
Rated voltage DC	1500
Type of fuse status indicator	None
Rated current	30A
Rated voltage	1500V
Voltage type	DC
Utilization category	Other

Characteristics

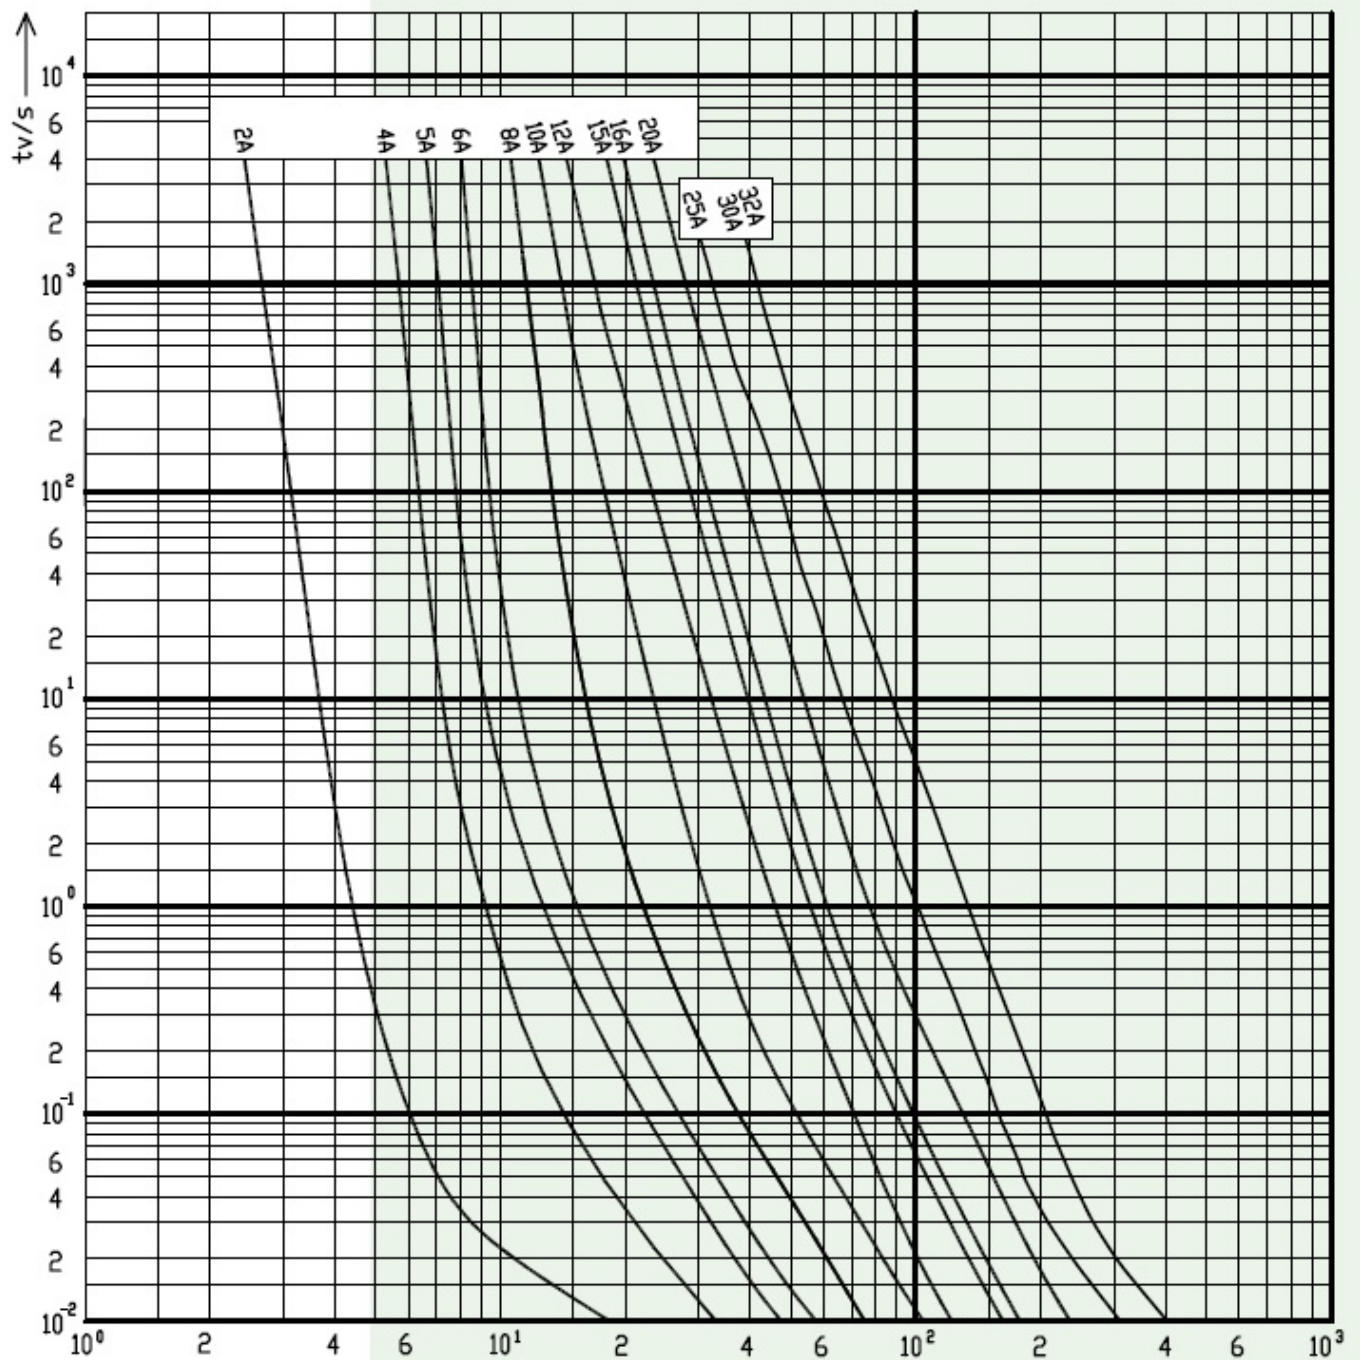

Dimension drawing

