

CH10/14x85 gPV 40A/1500V



Specifications

ETI Code	002626239
Description	CH10/14x85 gPV 40A/1500V
Class name	Fuse link
Rated current (A)	40
Type	CH
Size	CH10/14x85
Characteristics	gPV
Rated DC voltage (V)	1500
Indicator	None
Breaking capacity DC (kA)	50
Power dissipation (W)	7,7
Standards	IEC 60269-6
Power dissipation (0,7x In) (W)	3,2
Operating joule integral (A2s)	2500
L/R (ms)	2
Prearcing joule integral (A2s)	400
Application	For protection of photovoltaic modules
efuse	1

[Online product page](#) 

Other documentation




[Technical data catalogue](#)
[3D Model](#)
[CE declaration](#)
[Eplan file](#)

ETIM international clasification

Classification	EC002704
Class name	Low Voltage HRC fuse
Application	For protection of photovoltaic modules
Construction size	Other
Rated voltage DC	1500
Type of fuse status indicator	None
Rated current	40A
Rated voltage	1500V
Voltage type	DC
Utilization category	Other

Characteristics

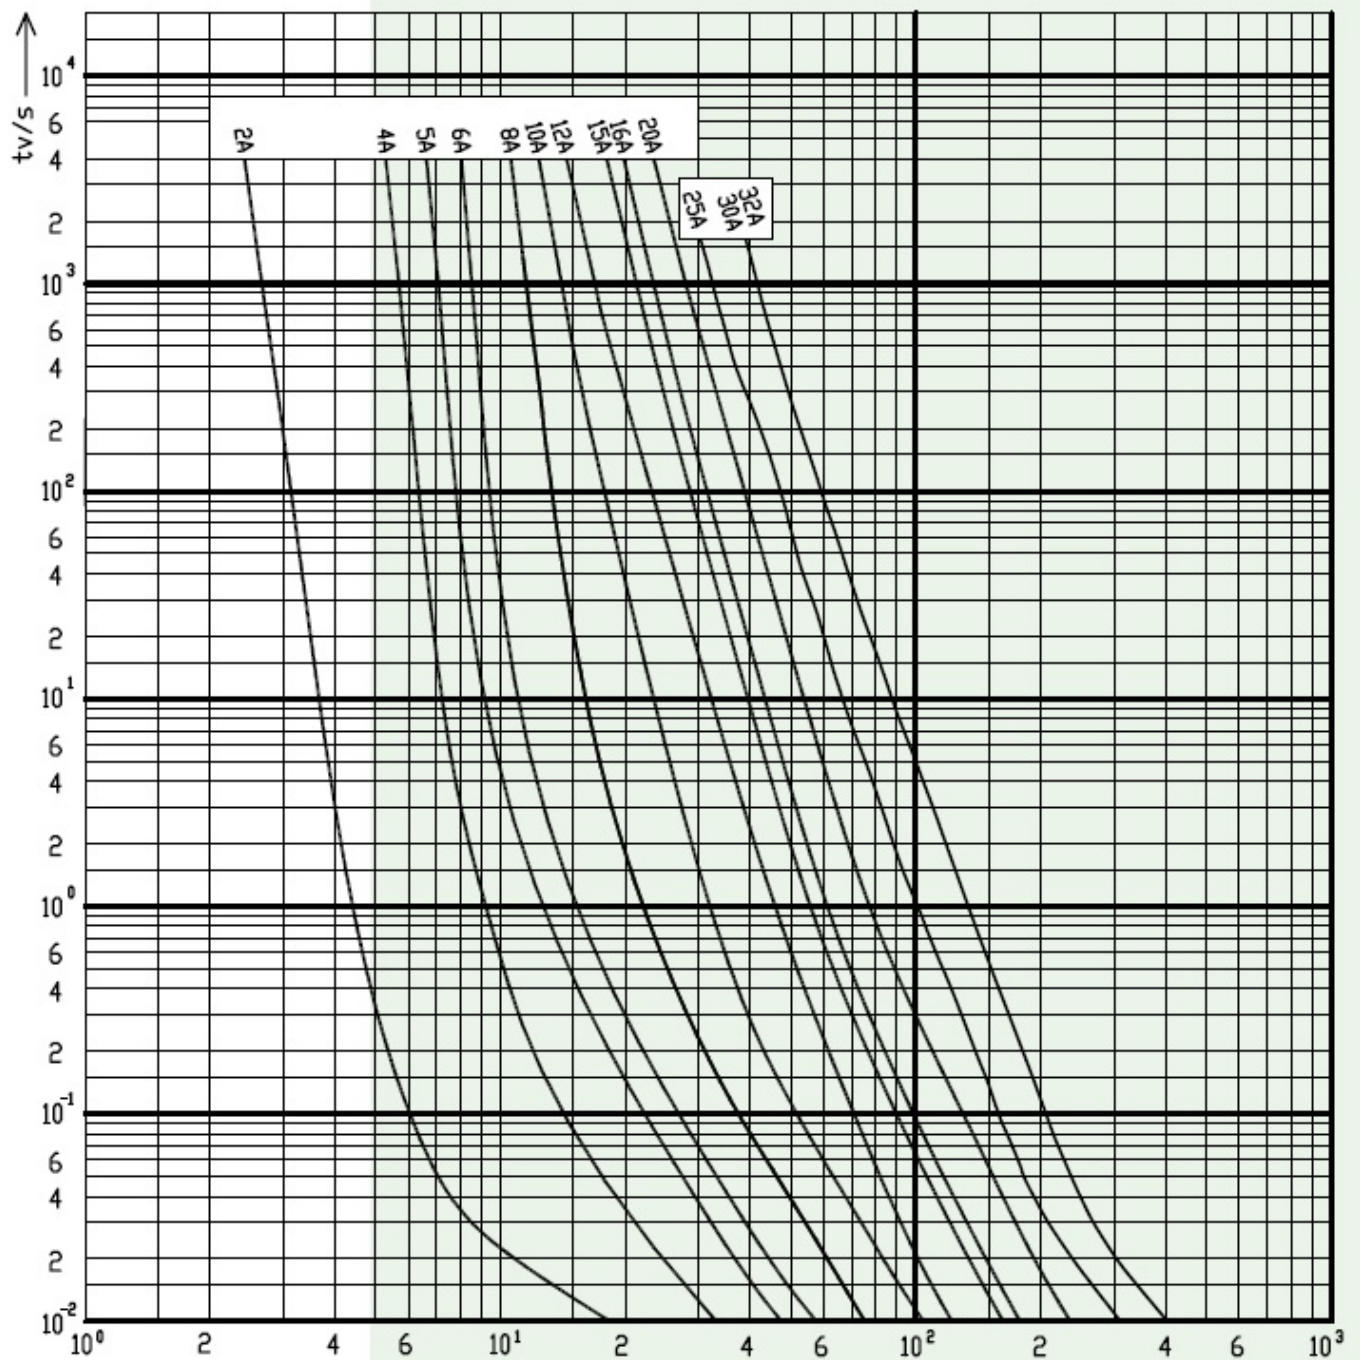

Dimension drawing

