

NH00 gBat 50A/550V DC



Specifications

ETI Code	004110218
Description	NH00 gBat 50A/550V DC
Class name	Fuse link
Rated current (A)	50
Type	NH
Size	NH00
Characteristics	gBat
Rated DC voltage (V)	550
Indicator	Top fuse status indicator
Breaking capacity DC (kA)	30
Power dissipation (W)	11,5
Standards	IEC 60269-7
Power dissipation (0,7x In) (W)	4,8
Operating joule integral (A2s)	5.300
L/R (ms)	3
Prearcing joule integral (A2s)	1.700
Application	Battery protection
efuse	1

[Online product page](#)

Other documentation




- Technical data catalogue
- 3D Model
- Instruction manual
- CE declaration
- Eplan file

ETIM international clasification

Classification	EC000055
Class name	Low Voltage HRC fuse
Construction size	NH00
Rated current	50
Rated voltage	550
Voltage type	DC
Rated switching capacity	30
Utilization category	Other
Type of fuse status indicator	Top fuse status indicator
Insulated metal gripping lugs (IMGL)	

Characteristics

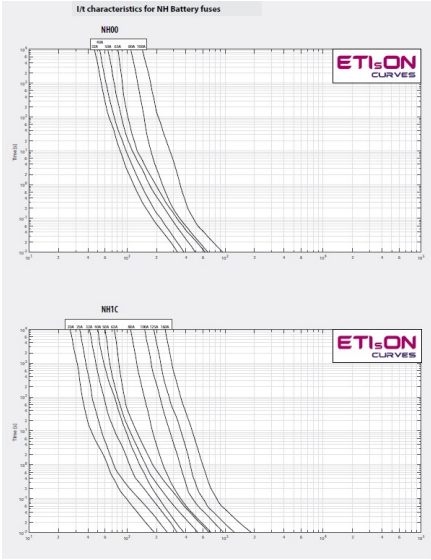

Dimension drawing

