

NH1 gBat 125A/440V DC



Specifications

ETI Code	004723111
Description	NH1 gBat 125A/440V DC
Class name	Fuse link
Rated current (A)	125
Type	NH
Size	NH1C
Characteristics	gBat
Rated DC voltage (V)	440
Indicator	Top fuse status indicator
Breaking capacity DC (kA)	30
Power dissipation (W)	14,8
Standards	IEC 60269
Power dissipation (0,7x I _n) (W)	6,6
Operating joule integral (A2s)	26.550
L/R (ms)	10
Prearcing joule integral (A2s)	14.750
Application	Battery protection
efuse	1

Online product page 

Other documentation




Technical data catalogue
3D Model
Instruction manual
Eplan file

ETIM international clasification

Classification	EC000055
Class name	Low Voltage HRC fuse
Construction size	NH1C
Rated current	125
Rated voltage	440
Voltage type	DC
Rated switching capacity	30
Utilization category	Other
Type of fuse status indicator	Top fuse status indicator
Insulated metal gripping lugs (IMGL)	

Characteristics

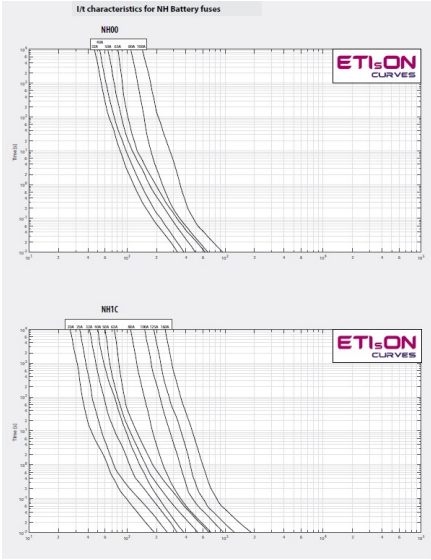

Dimension drawing

