

NH1 gBat 160A/440V DC



Specifications

ETI Code	004723112
Description	NH1 gBat 160A/440V DC
Class name	Fuse link
Rated current (A)	160
Type	NH
Size	NH1C
Characteristics	gBat
Rated DC voltage (V)	440
Indicator	Top fuse status indicator
Breaking capacity DC (kA)	30
Power dissipation (W)	17,6
Standards	IEC 60269
Power dissipation (0,7x In) (W)	7,9
Operating joule integral (A2s)	50.184
L/R (ms)	10
Prearcing joule integral (A2s)	27.880
Application	Battery protection
efuse	1

[Online product page](#)

Other documentation



[Technical data catalogue](#)

[3D Model](#)


[Instruction manual](#)

[Eplan file](#)

ETIM international classification

Classification	EC000055
Class name	Low Voltage HRC fuse
Construction size	NH1C
Rated current	160
Rated voltage	440
Voltage type	DC
Rated switching capacity	30
Utilization category	Other
Type of fuse status indicator	Top fuse status indicator
Insulated metal gripping lugs (IMGL)	

Characteristics

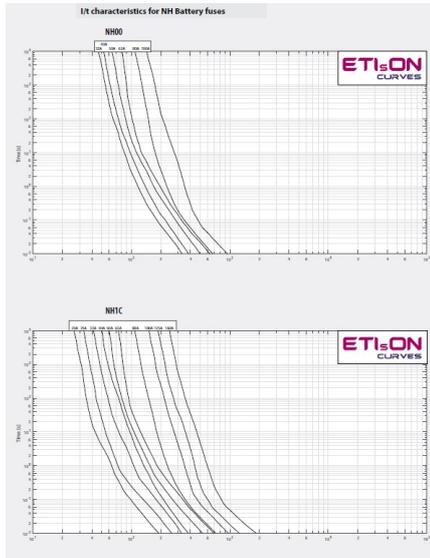

Dimension drawing

