

Product datasheet

Model: CEE-Inl.white RAL 9010

Description: CEE-Inl.white RAL 9010 flush mounted new cover with foam

Item numbers: 4601556



Technical specifications:

Net weight: 0.25kg

Type of coupler to use: CEE 6H

Voltage: 230V

Mounting hole (diameter): 92mm

Material cover: ABS(Acrylonitril-butadieën-styreen)

Material housing: ABS(Acrylonitril-butadieën-styreen)

Specifications used Acrylonitril-butadieën-styreen:

Tensile strength: 41-60 Mpa

Hardness: 108-115 Rockwell

Thermal conductivity: 0.17-0.188 W/m.K

UV resistance: Stabilized *

Impact strength: 0.56-2.2 J/cm

Density: 1030-1070 kg/m³

Breakdown potential: 14-20 kV/mm

*Stabilizing time depending on local UV radiation

Specifications used Polyamide:

Tensile strength: 408 kg/cm²

Hardness: R92



UV resistance: Stabilized *

Density: 1130 kg/m³

Breakdown potential: 17kV/mm

*Stabilizing time depending on local UV radiation

Dimensions (mm ±1mm)

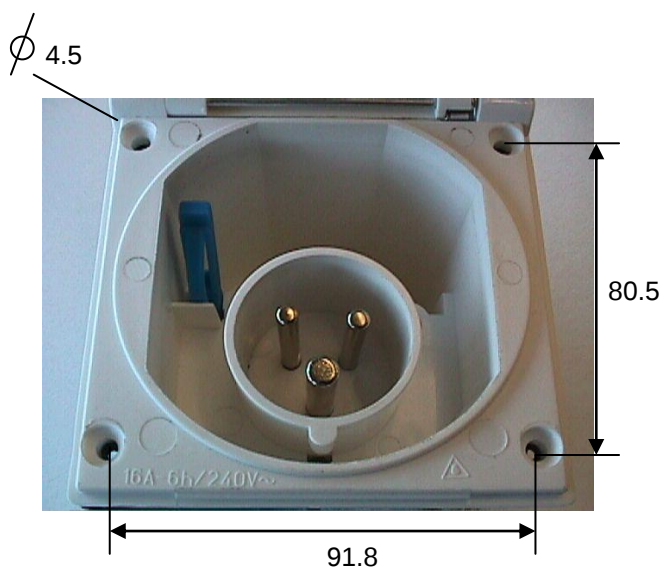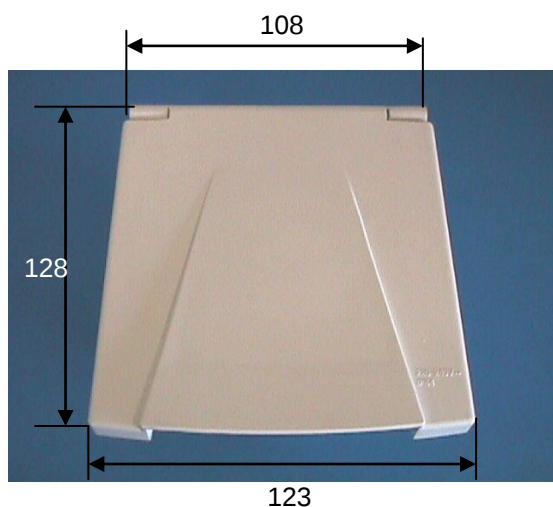

Product datasheet

