


Battery cable



Battery cable

1 x 16 mm², 1 x 25 mm², 1 x 35 mm², 1 x 50 mm²,
1 x 70 mm², 1 x 95 mm², 1 x 120 mm²

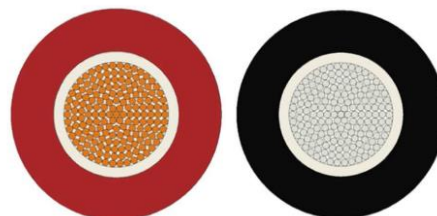

Construction

Conductor	Electrolytic/ Annealed Copper (Class 6)	
Insulation	PVC (Natural)	
Sheath	NBR PVC (RAL 3000 Red / RAL 9005 Black / RAL 2008 Orange)	
Cable diameter (± 5%)	16 mm ²	: 9.20 mm
	25 mm ²	: 10.40 mm
	35 mm ²	: 11.30 mm
	50 mm ²	: 13.10 mm
	70 mm ²	: 15.30 mm
	95 mm ²	: 17.40 mm
	120 mm ²	: 19.60 mm

Cable marking

DGR [CROSS SECTION] IEC 245-6 WW/YYYY CE [METER MARK] [LOTNO-PART NO]

Technical and electrical properties (20°C)

Operating Voltage	0.6 / 1 Kv
Test Voltage	3.5 kV
Temperature range	-40°C...+70°C

