
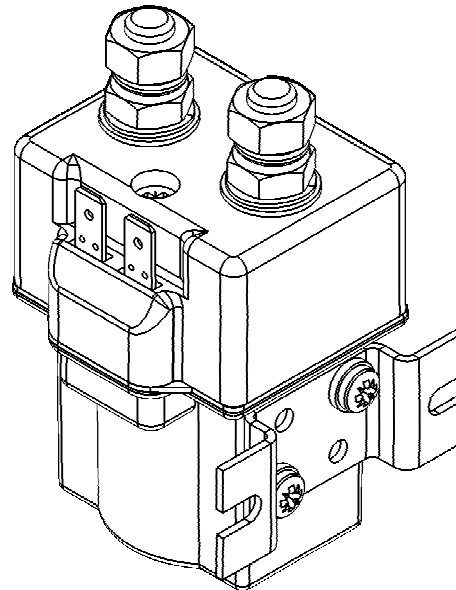




- | | | | | | | |
|-------------|---------|--------------------|------------------|-------------------|---------------------|-------|
| SW80-381P | 28V CO | 73 Ω | 18.5V MAX | 7.0V MAX | | |
| SW80-357P | 24V CO. | 52 Ω | 16.0V MAX | 6.5V MAX | | |
| SWITCH TYPE | VOLTAGE | COIL
RESISTANCE | PULL-IN
VOLTS | DROP-OUT
VOLTS | RESISTOR
(0.25W) | DIODE |

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION OWNED BY ALBRIGHT INTERNATIONAL LTD. AND MAY NOT BE DUPLICATED OR COMMUNICATED TO OTHER PARTIES WITHOUT THE WRITTEN PERMISSION OF ALBRIGHT INTERNATIONAL LTD. 125 RED LION ROAD, TOLWORTH, SURREY, KT6 7QS, ENGLAND.

TEL: +44 (0) 20 8390 5357 FAX: +44 (0) 20 8390 1927 WEB: www.albrightinternational.com EMAIL: technical@albrightinternational.com