




## Product Details

# FLEXIBLE SOLAR PANEL



## TF-S-120W/39.7V-FLUS

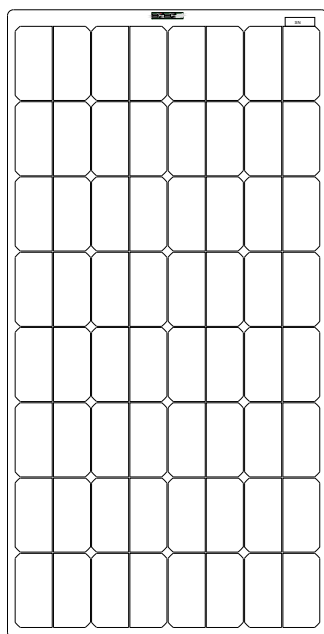

## Module Diagram

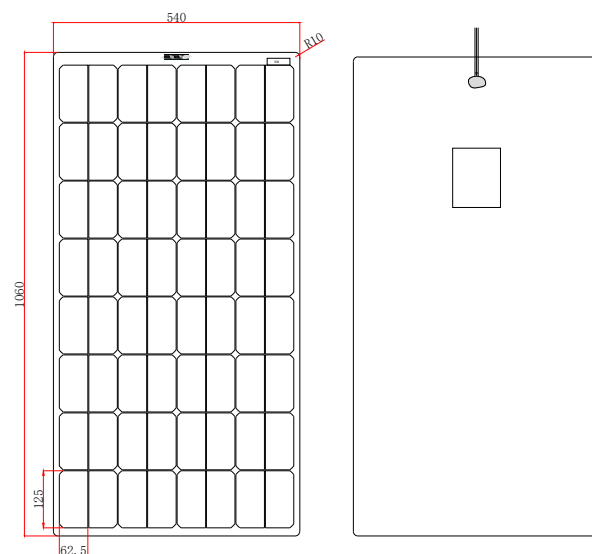

### Solar panel bending diagram



— : Solar panel

## Electrical Characteristics

Maximum power(Pmax)	120W
Open-circuit voltage(Voc)	46.7V
Voltage at Pmax(Vmp)	39.7V
Short-circuit current(Isc)	3.20A
Current at Pmax(Imp)	3.03A
Cells Efficiency(%)	24.40%
The maximum system voltage	200V DC(IEC)
Power temperature coefficient	-0.27%/°C
Voltage temperature coefficient	-0.236%/°C
Current temperature coefficient	+0.058%/°C
Output power tolerance	±3%
Operating Temperature	-40°C~+85°C

## Specifications

Solar cell brand	SUNPOWER
No.of cells and connections	64(8*8)
Module dimension	1060*540*3mm
Weight	2.10kg
Waterproof	IP68
Certifications	CE, ROHS
Maximum bending arch height	150mm
Warranty	6 years and service life 20 years

## Product Introduction

Sungold TF series photovoltaic panel is an innovative glass-free solar panel. It adopts proven crystalline silicon solar cell.

Its technology and polymer composite material truly realize glass-free, lightweight, and thin new flexible solar panels, also TF series is as light as 3.5 kg/m<sup>2</sup>, which is only 30% of rigid solar panels.

