

TECHNICAL DATA SHEET

Ref. 530101

Unipolar battery

MASTER SWITCH

24VDC / 150A



GENERAL CHARACTERISTICS

Protection degree: IP65
Ambient temperature: -40°C to +85°C
Weight: 0.24 Kg approx.
Contacts: Double cut copper
Connections: not polarized

FIELDS OF APPLICATION

Handling vehicles, industrial vehicles,
agriculture machinery, industry, navy...

POWER CIRCUIT

Connection: M10 terminals
Tightening torque: 0.9 +/- 0.1 daN·m
Type: normally open unipolar
Max. using tension: 48 V
Capacity: 150 A in continuous
450 A during 330 seconds
1000 A during 5 seconds


PARTICULAR CHARACTERISTICS:

Zinc plated finishing.
Corrosion test: 200h salt spray resistance


SPARE PARTS

Handle 580019



Connection diagram






Fixing diagram

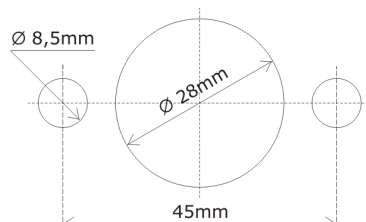


Size diagrams

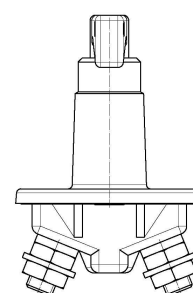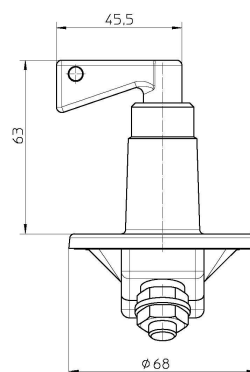

CLOSED

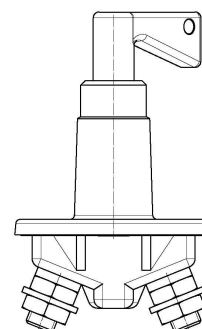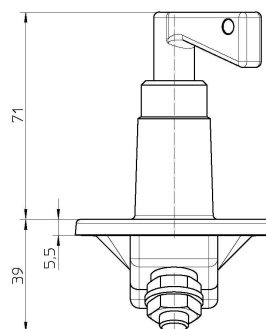

OPEN



P.I. LLINARS Park, C/ TECNOLOGIA, 82, NAVE N°7
08450 LLINARS DEL VALLÈS
BARCELONA (SPAIN)
Tel. : + 34.93.732.35.91 - Fax : + 34.93.732.35.90
WWW.CORMAR.ES - info@cormar.es