


Accukabel:

1x16 mm², 1x25 mm², 1x35 mm², 1x50 mm²,
1x70 mm², 1x95 mm², 1x120 mm²

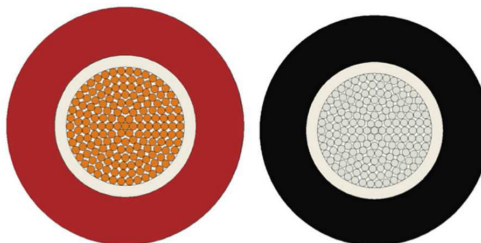

Construction

Conductor	Electrolytic/ Tinned Annealed Copper (Class 6)
Insulation	PVC (Natural)
Sheath	NBR PVC (RAL 3000 Red / RAL 9005 Black)
Cable Diameter (± 5%)	16 mm ² : 9.20 25 mm ² : 10.40 35 mm ² : 11.30 50 mm ² : 13.10 70 mm ² : 15.30 95 mm ² : 17.40 120 mm ² : 19.60



Cable Marking

www.top.systems | Battery cable - Flexible [CROSS SECTION] mm² IEC 245-6 WW/YYYY [LOTNO-PART NO] [METER MARK]

Technical And Electrical Properties (20 °C)

Operating Voltage	0.6/1 kV
Test Voltage	3.5 kV
Temperature Range	-40°C ••• + 70°C

