


## Accukabel:

1x16 mm<sup>2</sup>, 1x25 mm<sup>2</sup>, 1x35 mm<sup>2</sup>, 1x50 mm<sup>2</sup>,  
1x70 mm<sup>2</sup>, 1x95 mm<sup>2</sup>, 1x120 mm<sup>2</sup>

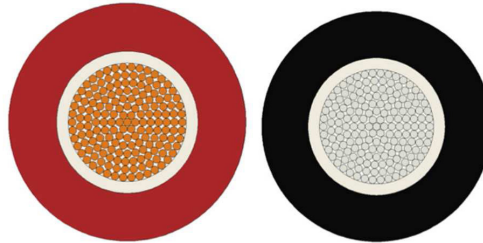

## Construction

Conductor	Electrolytic/ Tinned Annealed Copper (Class 6)
Insulation	PVC (Natural)
Sheath	NBR PVC (RAL 3000 Red / RAL 9005 Black)
Cable Diameter (± 5%)	16 mm <sup>2</sup> : 9.20 25 mm <sup>2</sup> : 10.40 35 mm <sup>2</sup> : 11.30 50 mm <sup>2</sup> : 13.10 70 mm <sup>2</sup> : 15.30 95 mm <sup>2</sup> : 17.40 120 mm <sup>2</sup> : 19.60



## Cable Marking

www.top.systems | Battery cable - Flexible [CROSS SECTION] mm<sup>2</sup> IEC 245-6 WW/YYYY [LOTNO-PART NO] [METER MARK]

## Technical And Electrical Properties (20 °C)

Operating Voltage	0.6/1 kV
Test Voltage	3.5 kV
Temperature Range	-40°C ••• + 70°C

